
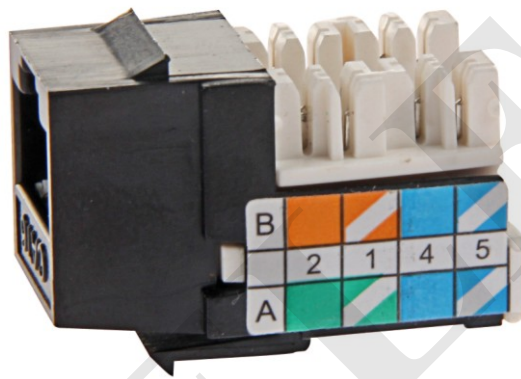


Cat.6 90 degree UTP Keystone Jack

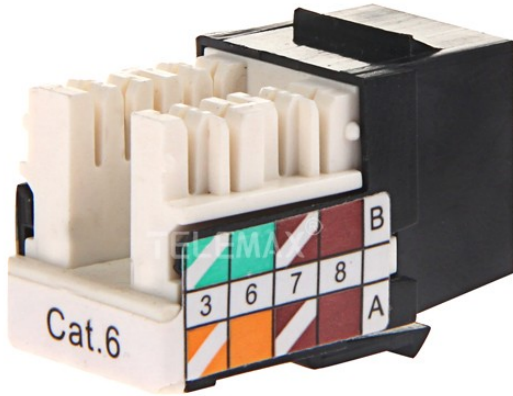

Standard:


C6 permanent link: conform to AN-SI/TIA/EIA-568 b.2-1.

Electrical:

- Voltage rating: 125 VAC RMS;
- Current rating: 1.5 AMP;
- Contact resistance: 100 Million HMS max;
- Insulation resistance: 1000 MEGOHMS min. @ 500 VDC;
- Dielectric strength: 750 VAC RMS 60 Hz, 1 min.;

Mechanical:

- Housing Material: PC
- Insert Material: ABS
- PCB Material:FR-4 T=1.2MM
- Contact Material: phosphor bronze stamp pin T=0.35MM
- IDC Material: phosphor bronze T=0.5mm with Tin Plating
- RJ 45 Jack life: 750 Times min.;
- IDC life: 200 times min.;
- Wire: AWG 22-26
- TIA Cat. 6 perm Link test: worst pair next margin ≥ 3 dB
- Retentiveness of insertion structure: 50N 60 $\pm$ 5 S.

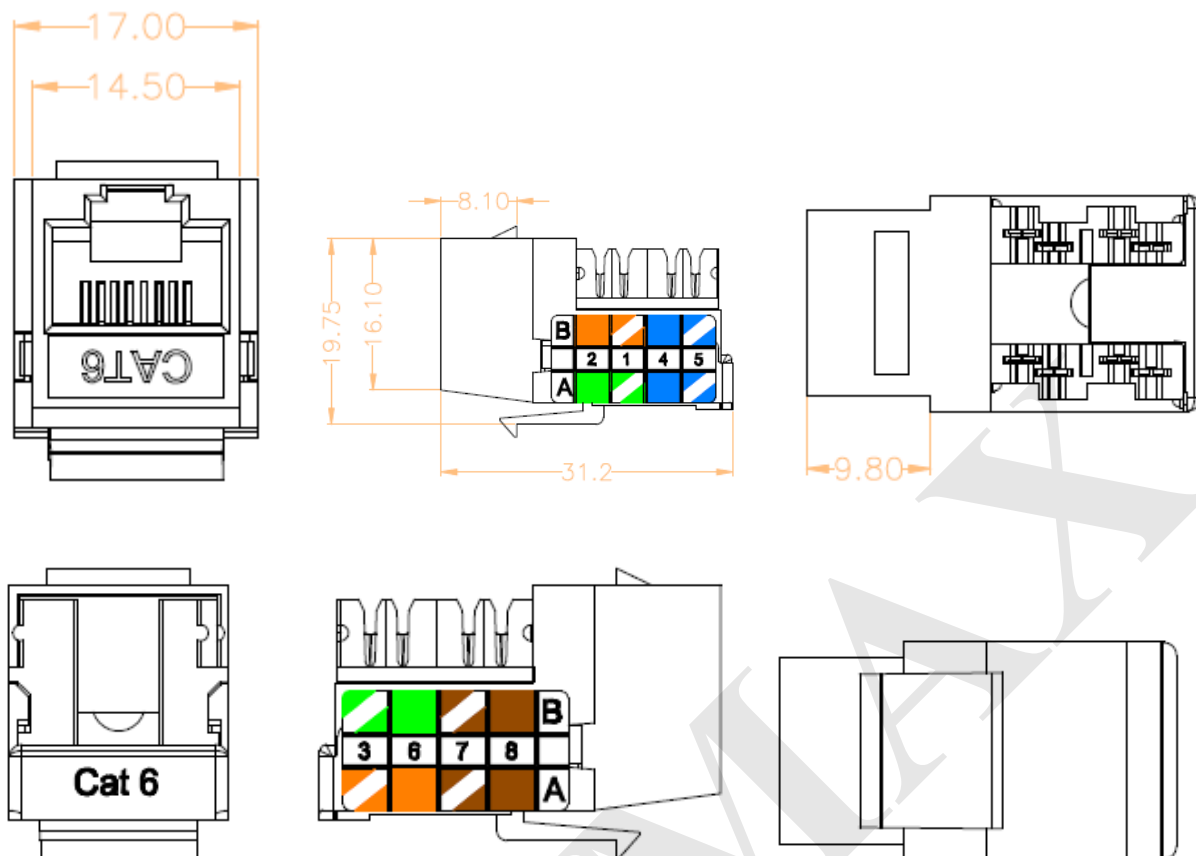**Environment of Adaptations:**

- Storage: $-40^{\circ} \sim +70^{\circ}$
- Operation: $-10^{\circ} \sim +60^{\circ}$

For More Information:

Email: sales@telemax.cn

www.telemax.cn

www.telemaxcable.com