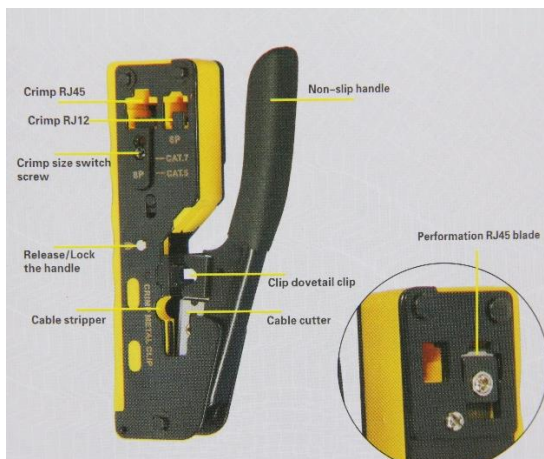# Cat. 5E/ 6/ 6A/ 7 Network Cable Crimping Tool

Modular Plug Crimper HT-719

Features:

- **The die opening is adjustable and precisely crimped**
  The screw located at CAT.5 is suitable for CAT.5E/6 /6A

  The screw located at CAT.7 is suitable for CAT. 7/ 8

- **Sharp cutting edge and neat cutting line**

- **The dovetail clips are precisely pressed together**

- **Anti-slip handle, comfortable grip**

Specifications:

- Material: **Cold-rolled steel**

- Functions: **Cutting, Stripping, Crimping RJ45 connectors**

- Crimping Holes: **8P/6P**

- Locking Function: **Yes**

- Blade Size: **21mm × 10mm**

将线身放入剪线口轻轻按压手柄
使其刀刃在外皮上切出道小口

将切好小口的线身放入半球式
剥线口中剥去网线外皮

确认568A/B接法及排线顺序
将网线平放在刀口下面
并预留出合适的长度(建议15mm)

将网线插入水晶头顶部放入对应钳口
夹紧网线钳即可完成

Operation Guide:

Crimp RJ45 CAT.5/5E/6

1. Squeeze the handle and push the rear lock cylinder to unlock the safety lock.

2. Put the network connector into the corresponding crimping port.

3. Press the handle to the bottom.

4. Remove the network connector to complete the crimp.

Crimp perforation RJ45 CAT.5/5E

When the perforation network connector is crimped, the excess thread is cut off directly by the blade.

Crimp RJ45 CAT.7/ 8

1. Crimp the network connector by the same way.

2. Clamp the pressed network connector into the tail clamp groove.

3. Squeeze the handle and tighten the tail clamp.

4. Remove the network connector to complete the crimp.

Environment of Adaptations:

- Storage: -40° ~ 70°

- Operation: -10° ~ 60°

For More Information:

Email: sales@telemax.cn

www.telemax.cn

www.telemaxcable.com